


PANEL FILTERS

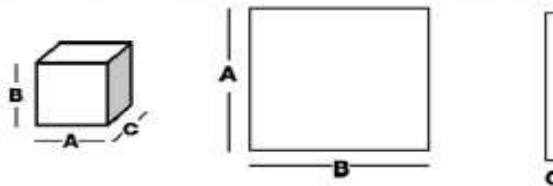

APPLICATIONS:

Rough primary filtration for air treatment units or air intake grids.

ADVANTAGES:

- High filtration area
- Thick synthetic media with high dust holding capacity, pleated between 2 rigid grids
- Easily renewable cell
- Replaceable filter media version available

GENERAL FEATURES:

- Efficiency
- Media: synthetic
- Frame: Galvanized steel
- Final pressure drop: 250 Pa
- Maximum T° in continuous service: 110°C



PANEL FILTER - G4

Description	Width A(mm)	Height B(mm)	Thickness C(mm)	Media area(m ²)	Flow rate(m ³ /h) /Delta P(Pa)
FGF-PF/G4	592	592	47	1	3400/65
FGF-PF/G4	287	592	47	0.5	1835/65
FGF-PF/G4	592	592	97	2.06	3400/45
FGF-PF/G4	287	592	97	1	1835/45

